



Wanli Tire Corporation Limited
Headquarters : NO.3 Wanli Road , Aotou Town , Conghua District , Guangzhou , P.R.China
Marketing Center :Guangzhou Intelligent Manufacturing Park, No.620, Shibei Industrial Road, Dashi Street,
Panyu District, Guangzhou, Guangdong, P.R.China.
Website: www.wanli-global.com Sales@wanlitire.cn
REV2024.04

MILEVER

TIRE CATALOG



MILEVER PASSENGER CAR& LIGHT TRUCK TIRE CATALOG

HP/UHP/HT/AT/RT/MT/LT/RFT/WINTER/ALL SEASON

WANLI TIRE CORPORATION LIMITED

COMPANY PROFILE

ABOUT US

Wanli Tire Co., Ltd. is controlled directly by Guangzhou Industrial Investment Holding Group Co., Ltd. It has three production bases, Conghua, Hefei and Diamond.

30.4 million
production capacity

24 million
PCR tires

2.4 million
TBR tires

4 million
two-wheeled tires

6 billion
output value

BRAND

"WANLI", "SUNNY", "APTANY" and "MILEVER" are four tire brands Wanli Tire Corporation Limited sells in overseas market. Wanli Tire Corporation constantly develop and enrich the product line with the change of market, which has covered nine series of passenger tire products of Economic, Comfort, Racing tire, UHP, SUV on/off-road, LT, Run Flat tire, Winter tire, and All Season tire with more than 6,000 sizes which can meet all requirements from different markets. Our major products incorporate patterns like Comfort series SP026, UHP series SA302 SUV series SU025, etc.



R&D STRENGTH

WANLI has a national enterprise technology center, a nationally recognized laboratory, a contracted laboratory of the China Rubber Association, a post-doctoral research station, a Guangdong academician expert enterprise workstation, and a Guangdong engineering technology research and development center. With a full range of simulation analysis capabilities and the trial production and testing capabilities of rubber tire, it has a series of international advanced R&D facilities, and has established advanced laboratories for tire rolling resistance, rigidity, six-component force, high-speed uniformity, noise and vibration, simulation analysis, etc., establishing its R&D capabilities at the leading level in China.

PRODUCT STRENGTH


WANLI is committed to providing consumers with high-quality tires, and officially passed the TÜV Rheinland test, becoming the first tire enterprise in China to pass the TÜV Rheinland test. In 2016, Wanli Tire Comfort Series H220 was included in the first and second batches of "Automotive Green Tire Grade Certification" issued by China Automotive Technology and Research Center, which shows that WANLI's product quality and technical strength are in the leading position in China.

MARKET RECOGNITION

Wanli Tire earns a good reputation in domestic and overseas markets, and its products sell well in more than 150 countries and regions around the world. In terms of OE market, WANLI supply more than 80 models of more than 20 OEMs, including Dongfeng Citroen / Peugeot, Zhengzhou Nissan, Beijing Hyundai, GAC Trumpchi, GAC Honda, JAC, GAC Hino, Nanjing Jinlong, Zhuzhou CRRC and Bombardier.

FUTURE

In the future, WANLI will continue to make efforts in R&D, manufacturing, branding and sales to build the first large state-owned enterprise covering rubber parts for the whole vehicle industry in China. It is planned to achieve an output value of 10 billion yuan by 2025, ranking among the top five in China's tire industry and the top three in technological research and development in China's tire industry.

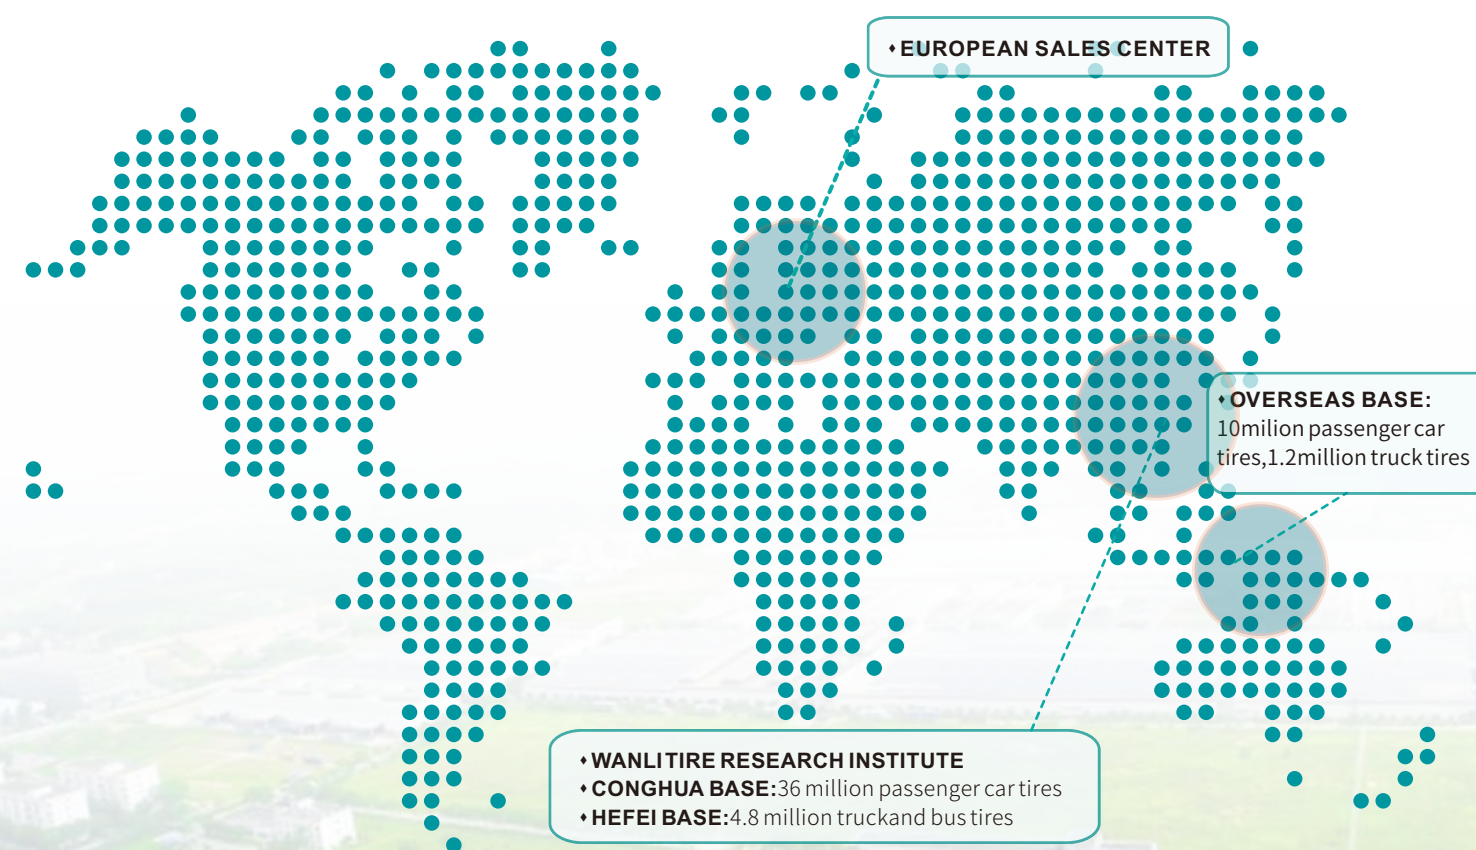

COMFORT SERIES

SPORT SERIES



MP071



MP270



MA352



MA349

RUN-FLAT SERIES

LIGHT TRUCK SERIES



MA346



ML150

SUV/4X4 SERIES



MU074



MU069



MU169



MU050



MU053



MU160

ALL SEASON SERIES



MC545



MC557

WINTER SERIES



MW255



MW655



MW675



MW356



MW147

PATTERN LIST

COMFORT SERIES..... 5-8

• MP071 MP270

SPORT SERIES..... 9-12

• MA352 MA349

RUN-FLAT SERIES..... 13-14

• MA346

LIGHT TRUCK SERIES..... 15-16

• ML150

SUV/4X4 SERIES..... 17-28

• MU074 MU069 MU169 MU050 MU053 MU160

ALL SEASON SERIES..... 29-32

• MC545 MC557

WINTER SERIES..... 33-42


• MW255 MW655 MW675 MW356 MW147

MP071

For small & compact cars



Rim Size:	13-16
Speed Rating:	T-W
Series:	40-80

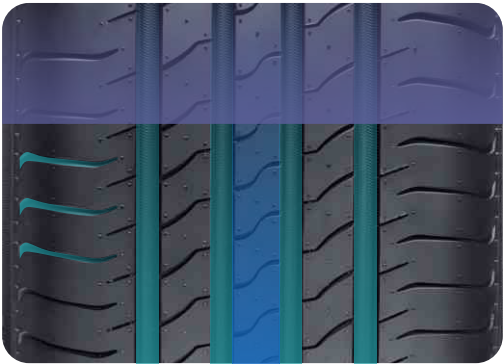

SILENCE TECHNOLOGY,
FULL-DIMENSIONAL NOISE REDUCTION

- The tread adopts "variable pitch and frequency shifting technology" to significantly reduce the tire noise by 2dB;
- The tread groove is specially treated with the latest "3D self-conducting technology", which has soft vibration, smooth airflow conduction, improved quietness and comfort performance;
- The closed shoulder groove design blocks the air circulation between the tread grooves and reduces the noise during driving.

TECHNOLOGY ENABLEMENT,
BALANCED PERFORMANCE

- Through simulation, optimize the distribution of ground pressure, improve driving stability and shorten braking distance;
- The middle high-rigidity rib improves the handling, wear-resistance and comfort performance;
- The design of high-efficiency water displacement system of four main grooves in the circumferential direction can provide good water displacement performance and anti-slip ability, and ensure the wet grip performance.

ENERGY-SAVING FORMULA, FREE OF RANGE
WORRY

- The tread formula adopts the latest high silicon formula design, which not only helps to improve the grip performance of the tire, but also effectively reduces the rolling resistance and improves the cruising range by 7%.

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
13	175/60R13	-	77T	-	5J	177	540	250	412
	165/65R13	-	77T	-	5J/5.00B	170	544	250	412
	175/65R13	-	80T	-	5J/5.00B	177	558	250	450
	145/70R13	-	71T	-	4½J/4.50B	150	534	250	345
	165/70R13	-	79T	-	5J	170	562	250	437
	175/70R13	-	82T	-	5J	177	576	250	475
	185/70R13	-	86T	-	5½J	189	590	250	530
	175/75R13	-	84T	-	5J	177	584	250	500
	165/80R13	-	83T	-	4½J/4.50B	165	594	240	487
	185/60R14	-	82H	-	5½J	189	578	250	475
14	175/65R14	-	82T	-	5J	177	584	250	475
	185/65R14	-	86H	-	5½J	189	596	250	530
	175/70R14	-	84T	-	5J	177	602	250	500
	185/70R14	-	88T	-	5½J	189	616	250	560
15	195/50R15	-	82V	-	6J	201	577	250	475
	195/55R15	-	85V	-	6J	201	595	250	515
	185/60R15	-	88V	XL	5½J	189	603	290	560

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
15	195/60R15	-	88H	-	6J	201	615	250	560
	195/60R15	-	88V	-	6J	201	615	250	560
	205/60R15	-	91H	-	6J	209	627	250	615
	185/65R15	-	88H	-	5½J	189	621	250	560
	195/65R15	-	91H	-	6J	201	635	250	615
	205/65R15	-	94V	-	6J	209	647	250	670
	205/70R15	-	96H	-	6J	209	669	250	710
	195/55R16	-	87V	-	6J	201	620	250	545
	205/55R16	-	91V	-	6½J	214	632	250	615
	205/60R16	-	92H	-	6J	209	652	250	630
16	215/60R16	-	95H	-	6½J	221	664	250	690
	215/65R16	-	98V	-	6½J	221	686	250	750
	185/55R15	-	82V	-	6J	194	585	250	475
	205/55R15	-	88V	-	6½J	214	607	250	560
16	185/50R16	-	81V	-	6J	194	592	250	462
	215/40ZR16	-	86W	XL	7½J	218	578	290	530

★:coming soon

MP270
For small & compact cars



Immersed low noise and light sound

Rim Size:	13-17
Speed Rating:	T-V
Series:	50-80



■ PERFORMANCE BALANCING:

The finite element simulation technique is used to simulate and optimize the tire contour design in order to obtain the optimal imprint shape and uniform grounding pressure distribution, which ensures better handling performance, comfortable ride and uniform wear appearance.

■ Inside-Soft tyre pattern block facilitates ride comfort and wetland performance.

■ Middle-The middle tread pattern of the tire adopts a smooth strip design with a high rigidity of the pattern block, which helps to improve the control performance.

■ Outside-The closed shoulder tread design can improve the rigidity and anti-slip performance of tire shoulder tread.

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
13	165/65R13	-	77T	-	5J	170	544	250	412
	165/70R13	-	79T	-	5J	170	562	250	437
	175/70R13	-	82T	-	5J	177	576	250	475
	185/70R13	-	86T	-	5.50B/5½J	189	590	250	530
	155/80R13	-	79T	-	4½J	157	578	240	437
	165/60R14	-	75H	-	5J	170	554	250	387
14	185/60R14	-	82H	-	5½J	189	578	250	475
	155/65R14	-	75T	-	4½J/4.50B	157	558	250	387
	165/65R14	-	79T	-	5J	170	570	250	437
	175/65R14	-	82T	-	5J	177	584	250	475
	185/65R14	-	86H	-	5½J	189	596	250	530
	165/70R14	-	85T	XL	5J	170	588	290	515
15	175/70R14	-	84T	-	5J	177	602	250	500
	185/70R14	-	88T	-	5½J	189	616	250	560
	175/50R15	-	75H	-	5½J	182	557	250	387
	185/50R15	-	79V	-	6J	194	566	250	437
	195/50R15	-	82V	-	6J	201	577	250	475
	185/55R15	-	82V	-	6J	194	585	250	475
16	195/55R15	-	85H	-	6J	201	595	250	515
	195/55R15	-	85V	-	6J	201	595	250	515
	165/60R15	-	81H	XL	5J	170	579	290	462
	175/60R15	-	81H	-	5J	177	591	250	462

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
15	185/60R15	-	88V	XL	5½J	189	603	290	560
	195/60R15	-	88H	-	6J	201	615	250	560
	205/60R15	-	91H	-	6J	209	627	250	615
	185/65R15	-	88H	-	5½J	189	621	250	560
	195/65R15	-	91H	-	6J	201	635	250	615
	205/65R15	-	94V	-	6J	209	647	250	670
16	215/65R15	-	100H	XL	6½J	221	661	290	800
	205/70R15	-	96H	-	6J	209	669	250	710
	215/70R15	-	98H	-	6½J	221	683	250	750
	185/55R16	-	83V	-	6J	194	610	250	487
	195/55R16	-	87V	-	6J	201	620	250	545
	205/55R16	-	91V	-	6½J	214	632	250	615
17	215/55R16	-	93V	-	7J	226	642	250	650
	225/55R16	-	99V	XL	7J	233	654	290	775
	195/60R16	-	89H	-	6J	201	640	250	580
	205/60R16	-	92H	-	6J	209	652	250	630
	215/60R16	-	95H	-	6½J	221	664	250	690
	225/60R16	-	98V	-	6½J	228	676	250	750
17	215/65R16	-	98V	-	6½J	221	686	250	750
	225/55R17	-	97V	-	7J	233	680	250	730

MA352

Suitable for medium and high class vehicles



Safety, control, energy saving

Rim Size:	16-22
Speed Rating:	V-Y
Series:	30-55



OUTSTANDING CONTROL,FREE DRIVING

■ Asymmetric tread design, different division of internal and external tread increasing the friction between tire and the ground, reducing the risks of sideslip from emergency braking, to bring the ultimate grip performance, and improve vehicle driving stability and safety.

ENERGY EFFICIENT FOR LONGER RANGE

■ The tread adopts FET formula design. Evener blending of silicon particles reduces the friction, which will greatly improve the energy saving performance.

MULTIPLE PROTECTION FOR DRIVING SAFETY

■ The center wide-groove drainage system design helps the rapid drainage, effectively enhances the stability on wet land control and braking performance, protects the safety for driver regardless of the wind and rain.

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
17	205/40ZR17	-	84W	XL	7½J	212	596	290	500
	205/45ZR17	-	88W	XL	7J	206	616	290	560
	215/45ZR17	-	91W	XL	7J	213	626	290	615
	225/45ZR17	-	94W	XL	7½J	225	634	290	670
	205/50ZR17	-	93W	XL	6½J	214	638	290	650
	215/50ZR17	-	95W	XL	7J	226	648	290	690
	225/50ZR17	-	98W	XL	7J	233	658	290	750
	215/55ZR17	-	98W	XL	7J	226	668	290	750
	225/55ZR17	-	101W	XL	7J	233	680	290	825
	235/55ZR17	-	103W	XL	7½J	245	690	290	875
18	225/40ZR18	-	92W	XL	8J	230	637	290	630
	235/40ZR18	-	95W	XL	8½J	241	645	290	690
	245/40ZR18	-	97W	XL	8½J	248	653	290	730
	225/45ZR18	-	95W	XL	7½J	225	659	290	690
	235/45ZR18	-	98W	XL	8J	236	669	290	750
	245/45ZR18	-	100W	XL	8J	243	677	290	800
	235/50ZR18	-	97W	-	7½J	245	693	250	730
	235/55ZR18	-	100W	-	7½J	245	715	250	800
	245/45ZR20	-	103W	XL	8J	243	728	290	875
	265/50R20	-	111V	XL	8½J	277	774	290	1090
16	195/45R16	-	84V	XL	6½J	195	582	290	500
17	205/55ZR17	-	95W	XL	6½J	214	658	290	690
	235/45ZR17	-	97W	XL	8J	236	644	290	730

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
18	215/40ZR18	-	89W	XL	7½J	218	629	290	580
	215/50ZR18	-	92WW	-	7J	226	673	250	630
	245/35ZR18	-	92Y	XL	8½J	248	629	290	630
	245/50ZR18	-	104W	XL	7½J	253	703	250	800
	205/55R19	-	97V	XL	6½J	214	709	290	730
19	225/40ZR19	-	93W	XL	8J	230	663	290	650
	235/40ZR19	-	96W	XL	8½J	241	671	290	710
	235/50ZR19	-	103W	XL	7½J	245	719	290	875
	235/55ZR19	-	105W	XL	7½J	245	741	290	925
	245/40ZR19	-	98W	XL	8½J	248	679	290	750
	245/45ZR19	-	102W	XL	8J	243	703	290	850
	255/30ZR19	-	91W	XL	9J	260	637	290	615
	255/30ZR19	-	91Y	XL	9J	260	637	290	615
	255/55R19	-	111V	XL	8J	265	763	290	1090
	245/40ZR20	-	99W	XL	8½J	248	704	290	775
20	255/45ZR20	-	105W	XL	8½J	255	738	290	925
	275/35ZR20	-	102W	XL	9½J	278	700	290	850
	275/40ZR20	-	106W	XL	9½J	278	728	290	950
	255/40ZR21	-	102W	XL	9J	260	737	290	850
	275/45ZR21	-	110W	XL	9J	273	781	290	1060
21	285/35ZR21	-	105W	XL	10J	290	733	290	925
	315/40ZR21	-	115W	XL	11J	320	785	290	1215
22	265/40ZR22	-	106W	XL	9½J	271	771	290	950

★:coming soon




MA349

Suitable for intermediate cars and limousines



Outstanding performance
Safe and efficient

Rim Size:	16-20
Speed Rating:	V-W
Series:	30-55

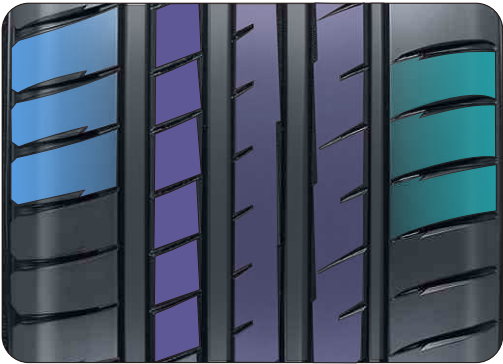


■ The inner side pattern is using various pitch design aims to lower the severity of pattern blocks, which will enhance the comfort performance. The cut-through between pattern blocks will enhance the control performance.

■ The outside shoulder pattern is using less quantity, wider pitch range as well as sealed and wider area design, which will increase the outside severity and contact area of the tire, making the control performance better.

■ Three wide range cut-through rib design can enhance the control performance, a large number of small steel sipes are used to break the ribs in order to lower the severity of the ribs and helps balance the comfort performance.

Using finite element simulation to optimize the outline of the tire in order to achieve the optimization shape of the tire and the balance of ground contact pressures, the higher content of white carbon black into the tread design formula is to ensure the control performance and comfort performance.

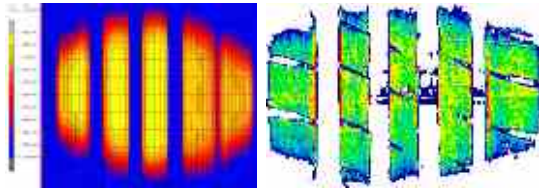

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
16	195/45R16	-	84V	XL	6½J	195	582	290	500
	205/45ZR16	-	87W	XL	7J	206	590	290	545
	195/50R16	-	88V	XL	6J	201	602	290	560
	205/50ZR16	-	87W	-	6½J	214	612	250	545
	205/40ZR17	-	84W	XL	7½J	212	596	290	500
	215/40ZR17	-	87W	XL	7½J	218	604	290	545
	245/40ZR17	-	95W	XL	8½J	248	628	290	690
	205/45ZR17	-	88W	XL	7J	206	616	290	560
	215/45ZR17	-	91W	XL	7J	213	626	290	615
	225/45ZR17	-	94W	XL	7½J	225	634	290	670
	235/45ZR17	-	97W	XL	8J	236	644	290	730
	245/45ZR17	-	95W	-	8J	243	652	250	690
	255/45R17	-	102V	XL	8½J	255	662	290	850
	205/50ZR17	-	93W	XL	6½J	214	638	290	650
	215/50ZR17	-	95W	XL	7J	226	648	290	690
	225/50ZR17	-	98W	XL	7J	233	658	290	750
	235/50ZR17	-	100W	XL	7½J	245	668	290	800
	205/55ZR17	-	95W	XL	6½J	214	658	290	690
	215/55ZR17	-	98W	XL	7J	226	668	290	750
	235/55ZR17	-	103W	XL	7½J	245	690	290	875
	225/35ZR18	-	87W	XL	8J	230	615	290	545
	255/35ZR18	-	94W	XL	9J	260	635	290	670
	265/35ZR18	-	97W	XL	9½J	271	643	290	730
	225/40ZR18	-	92W	XL	8J	230	637	290	630
	235/40ZR18	-	95W	XL	8½J	241	645	290	690
18	245/40ZR18	-	97W	XL	8½J	248	653	290	730
	255/40ZR18	-	99W	XL	9J	260	661	290	775
	215/45ZR18	-	93W	XL	7J	213	651	290	650
	225/45ZR18	-	95W	XL	7½J	225	659	290	690

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
	235/45ZR18	-	98W	XL	8J	236	669	290	750
	245/45ZR18	-	100W	XL	8J	243	677	290	800
	235/50ZR18	-	97W	-	7½J	245	693	250	730
	215/55R18	-	95V	-	7J	226	693	250	690
	225/55R18	-	98V	-	7J	233	705	250	750
18	235/55ZR18	-	100W	-	7½J	245	715	250	800
	255/55R18	-	109V	XL	8J	265	737	290	1030
	215/35ZR19	-	85W	XL	7½J	218	633	290	515
	225/35ZR19	-	88W	XL	8J	230	641	290	560
	235/35ZR19	-	91W	XL	8½J	241	647	290	615
	245/35ZR19	-	93W	XL	8½J	248	655	290	650
	275/35ZR19	-	100W	XL	9½J	278	675	290	800
	245/40ZR19	-	98W	XL	8½J	248	679	290	750
19	255/40ZR19	-	100W	XL	9J	260	687	290	800
	275/40ZR19	-	101W	-	9½J	278	703	250	825
	225/45ZR19	-	96W	XL	7½J	225	685	290	710
	245/45ZR19	-	102W	XL	8J	243	703	290	850
	275/45ZR19	-	108W	XL	9J	273	731	290	1000
	255/50ZR19	-	107W	XL	8J	265	739	290	975
	225/55R19	-	99V	-	7J	233	731	250	775
	225/30ZR20	-	85W	XL	8J	230	644	290	515
	225/35ZR20	-	90W	XL	8J	230	666	290	600
	245/35ZR20	-	95W	XL	8½J	248	680	290	690
20	255/35ZR20	-	102W	XL	9J	260	686	290	850
	315/35ZR20	-	110W	XL	11J	320	728	290	1060
	245/40ZR20	-	99W	XL	8½J	248	704	290	775
	275/40ZR20	-	106W	XL	9½J	278	728	290	950
	245/45ZR20	-	103W	XL	8J	243	728	290	875



MA346

Suitable for intermediate cars and limousines




Top-levelProtection for Utmost Safety
Outstanding performance Safe and efficient

MILEVER sidewall support enhancement technology can keep the vehicle traveling at a certain speed for a certain distance after the tire loses pressure. (When the pressure drops to 0 kPa, the vehicle can travel a distance of 80 km to 150 km at a speed of less than 80 km/h under normal use conditions).

Rim Size:	17-19
Speed Rating:	V-W
Series:	40-50

[Pattern Features]

Inner tread Asymmetrical tread design Outer tread

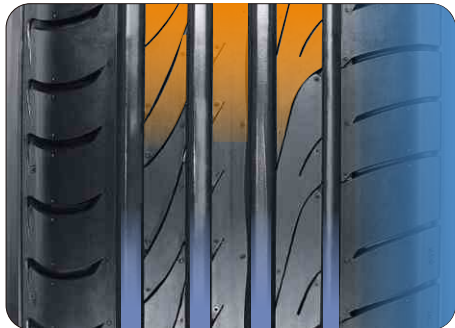


DYNAMIC CONTROL

- The narrow longitudinal center tread provides a larger contact area and its good cornering ability gives excellent control on dry roads.
- The sidewalls feature advanced non-deformation technology greatly improves compression performance and effectively resists deformation from internal traction caused by air leakage from all four tires.n from internal traction caused by air leakage from all four tires.


WATER EXPELLING TREAD

- The staggered height of the central tread enhances wet grip. Internal tread enhances water dispersion.




Special Sidewall Materials

Unique creative rubber materials with excellent heat resistance are used to provide sufficient rigidity to the sidewalls of the tire to prevent loss of vehicle control due to pressure loss if the tire is punctured.



RFT technology(SUNNY sidewall support enhancement technology)

It uses advanced sidewall structure to prevent deformation and maximize the sidewall pressure resistance through a computer simulation system, thus effectively resisting the deformation of the tire's internal tension and traction caused by a flat tire leak.



Special Sidewall Materials

The optimized tire bead component can optimize the stress distribution between the tire and the rim, thus effectively avoiding the tire unseating problem when the tire falls off.

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
17	225/45ZRF17	-	91W	-	7½J	225	634	250	615
	225/50ZRF17	-	94W	-	7J	233	658	250	670
18	275/40ZRF18	-	99W	-	9½J	278	677	250	775
	245/45ZRF18	-	96W	-	8J	243	677	250	710

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
18	225/50RF18	-	95V	-	7J	233	683	250	690
	235/50RF18	-	97V	-	7½J	245	693	250	730
19	255/50RF19	-	103V	-	8J	265	739	250	875

ML150
Suitable for business vehicles




High Mileage Anti-load and
Wear-resistance

Rim Size:	12-16
Speed Rating:	N-H
Series:	55-85



■ The symmetrical ribs in the middle and the unique "Z"-shaped design not only enhance the rigidity of pattern, but also increase the ground contact area, Which can optimize the driving and braking performance of the tire, making the braking distance shorter and drive safer in rainy days. Three longitudinal grooves on the tread provide excellent water displacement performance, which provide the tire outstanding control on wet grounds.

■ MILEVER ML150 adopts a new environmental-friendly formula, which lower the energy consumption. More environmentally friendly design for goods transportation achieves "dual carbon" emission reduction.

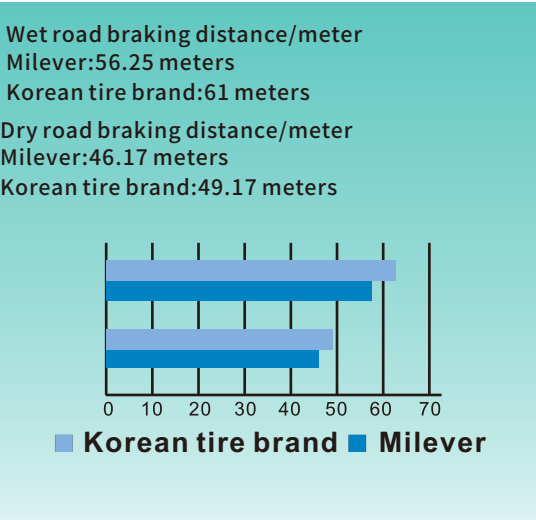

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
12	155R12C	8/D	88/86N	-	4½J	157	553	450	560
13	175R13C	8/D	97/95R	-	5.00B/5J	177	610	450	730
14	175/65R14C	6/C	90/88T	-	5J	177	584	375	600
	175/70R14C	6/C	95/93T	-	5J	177	602	375	690
	175/75R14C	8/D	99/98S	-	5J	177	618	475	775
	165R14C	8/D	96/95T	-	4½J	165	620	450	710
	175R14C	8/D	99/98R	-	5J	178	634	450	775
15	185R14C	8/D	102/100R	-	5½J	188	650	450	850
	195R14C	8/D	106/104R	-	5½J	198	666	450	950
	215/65R15C	6/C	104/102T	-	6½J	221	661	375	900
	195/70R15C	8/D	104/102R	-	6J	201	655	450	900
	205/70R15C	8/D	106/104R	-	6J	209	669	450	950
16	215/70R15C	8/D	109/107S	-	6½J	221	683	450	1030
	225/70R15C	8/D	106/103R	-	6½J	228	697	450	950
	225/70R15C	8/D	112/110R	-	6½J	228	697	450	1120
	185R15C	8/D	103/102R	-	5½J	188	674	450	875
	195R15C	8/D	106/104N	-	5½J	198	690	450	950
17	195R15C	8/D	106/104S	-	5½J	198	690	450	950

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
18	195/60R16C	6/C	99/97H	-	6J	201	640	375	775
	215/60R16C	8/D	108/106T	-	6½J	221	664	475	1000
	195/65R16C	8/D	104/102T	-	6J	201	660	475	900
	205/65R16C	8/D	107/105T	-	6J	209	672	475	975
	215/65R16C	8/D	109/107T	-	6½J	221	686	475	1030
19	225/65R16C	8/D	112/110R	-	6½J	228	698	475	1120
	235/65R16C	8/D	115/113T	-	7J	240	712	475	1215
	215/70R16C	6/C	108/106T	-	6½J	221	708	375	1000
	185/75R16C	8/D	104/102R	-	5J	184	684	475	900
	195/75R16C	8/D	107/105T	-	5½J	196	698	475	975
20	195/75R16C	10/E	110/108T	-	5½J	196	698	525	1060
	205/75R16C	10/E	113/111R	-	5½J	203	714	525	1150
	215/75R16C	10/E	116/114R	-	6J	216	728	525	1250
	215/75R16C	10/E	116/114S	-	6J	216	728	525	1250
	225/75R16C	10/E	121/120R	-	6J	223	744	575	1450
21	235/85R16C	8/D	114/111S	-	6½J	235	806	475	1180
	225/55R17C	8/D	109/107T	-	7J	233	680	475	1030


★:coming soon



MU074
For SUV



Rim Size:	16-21
Speed Rating:	T-W
Series:	50-70

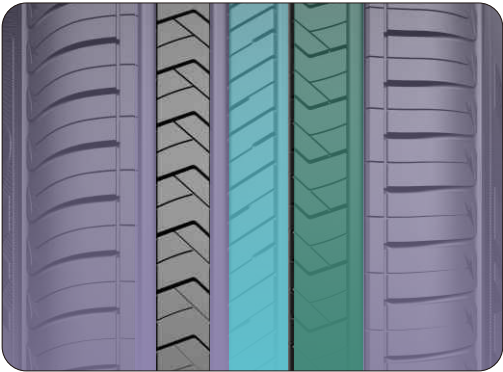

MORE QUIETNESS AND COMFORT

- The closed shoulder groove design helps to reduce the noise.
- The subsidiary groove design can reduce the rigidity of the pattern block, which provides comfortable performance.
- Optimized varied pitch block structure can reduce the noise effectively.

UPGRADED AND MORE ENVIRONMENTAL-FRIENDLY FORMULA

- Enhanced tire traction and reduced rolling resistance with the special high silicon formula.

OUTSTANDING CONTROL ON DRY AND WET GROUNDS

- The shoulder pattern use thin chamfer design, which can prevent gravel-trapping conditions. The thin grooves on the tread provide excellent wet drainage and handling stability. Four wide main grooves on the tread provide good drainage and contribute to wetland security.


Rim	Size	PR	LI&SS	XL	Std. Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
16	235/60R16	-	100V	-	7J	240	688	250	800
	215/70R16	-	100H	-	6½J	221	708	250	800
	245/70R16	-	107H	-	7J	248	750	250	975
	265/70R16	-	112T	-	8J	272	778	250	1120
17	215/60R17	-	96V	-	6½J	221	690	250	710
	225/60R17	-	99V	-	6½J	228	702	250	775
	225/65R17	-	102V	-	6½J	228	724	250	850
	265/65R17	-	112T	-	8J	272	776	250	1120
18	215/55R18	-	95V	-	7J	226	693	250	690
	225/55R18	-	98V	-	7J	233	705	250	750
	225/60R18	-	104V	XL	6½J	228	727	290	900
	235/60R18	-	107V	XL	7J	240	739	290	975

Rim	Size	PR	LI&SS	XL	Std. Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
19	235/55R19	-	101V	-	7½J	245	741	250	825
16	225/70R16	-	103H	-	6½J	228	722	250	875
	235/60R17	-	102H	-	7J	240	714	250	850
17	235/65R17	-	104H	-	7J	240	738	250	900
	265/70R17	-	115T	-	8J	272	804	250	1215
	245/60R18	-	105H	-	7J	248	751	250	925
	255/70R18	-	113T	-	7½J	260	815	250	1150
18	265/65R18	-	114H	-	8J	272	801	250	1180
	265/70R18	-	116H	-	8J	272	829	250	1250
	275/65R18	-	116T	-	8J	279	815	250	1250
20	285/50R20	-	116V	XL	9J	297	794	290	1250
21	275/50ZR21	-	113W	XL	8½J	284	809	290	1150

★:coming soon



MU069
Suitable for Urban SUV

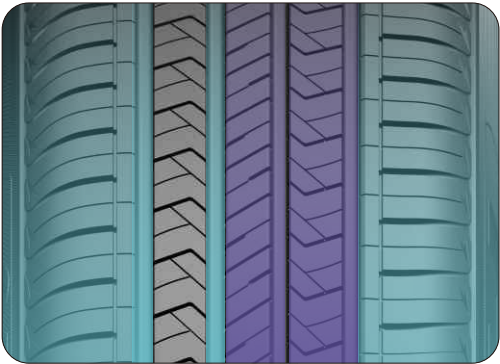

QUIETER AND MORE
COMFORTABLE EXPERIENCE

- The closed shoulder groove design helps to reduce the noise.
- The subsidiary groove design can reduce the rigidity of the pattern block, which provides comfortable performance.
- Optimized sequence structure can reduce the noise effectively.

OUTSTANDING CONTROL ON DRY
AND WET GROUNDS

- The shoulder pattern uses thin chamfer design, which can prevent pebbles trapping conditions.
- The thin grooves on the tread provide excellent grip on the wet roads and handling stability.
- Four wide main grooves on the tread provide good water displacement and grip on the wet roads.

UPGRADED AND MORE
ENVIRONMENTAL-FRIENDLY
FORMULA

- Enhanced tire traction and reduced rolling resistance with the special high silicon formula.

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
15	235/75R15	-	105T	-	6½J	235	733	250	925
	235/60R16	-	100V	-	7J	240	688	250	800
	215/70R16	-	100H	-	6½J	221	708	250	800
	225/70R16	-	103H	-	6½J	228	722	250	875
16	235/70R16	-	106H	-	7J	240	736	250	950
	245/70R16	-	107H	-	7J	248	750	250	975
	265/70R16	-	112T	-	8J	272	778	250	1120
	275/70R16	-	114T	-	8J	279	792	250	1180
17	215/60R17	-	96V	-	6½J	221	690	250	710
	225/60R17	-	99V	-	6½J	228	702	250	775
	235/60R17	-	102H	-	7J	240	714	250	850
	255/60R17	-	106H	-	7½J	260	738	250	950
18	225/65R17	-	102V	-	6½J	228	724	250	850
	235/65R17	-	104H	-	7J	240	738	250	900
	245/65R17	-	111T	XL	7J	248	750	290	1090
	265/65R17	-	112T	-	8J	272	776	250	1120
19	285/65R17	-	116H	-	8½J	292	802	250	1250
	245/70R17	-	110T	-	7J	248	776	250	1060
	265/70R17	-	115T	-	8J	272	804	250	1215
	235/50ZR18	-	101W	XL	7½J	245	693	290	825
20	225/55R18	-	98V	-	7J	233	705	250	750
	235/55R18	-	100V	-	7½J	245	715	250	800
	225/60R18	-	104V	XL	6½J	228	727	290	900

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
18	235/60R18	-	107V	XL	7J	240	739	290	975
	245/60R18	-	105H	-	7J	248	751	250	925
	265/60R18	-	114H	XL	8J	272	775	290	1180
	285/60R18	-	116H	-	8½J	292	799	250	1250
19	265/65R18	-	114H	-	8J	272	801	250	1180
	275/65R18	-	116T	-	8J	279	815	250	1250
	255/70R18	-	113T	-	7½J	260	815	250	1150
	265/70R18	-	116H	-	8J	272	829	250	1250
20	235/40ZR19	-	96W	XL	8½J	241	671	290	710
	235/55R19	-	101V	-	7½J	245	741	250	825
	275/40ZR20	-	106W	XL	9½J	278	728	290	950
	245/45ZR20	-	103W	XL	8J	243	728	290	875
21	285/50R20	-	116V	XL	9J	297	794	290	1250
	235/55R20	-	102V	-	7½J	245	766	250	850
	275/55R20	-	117V	XL	8½J	284	810	290	1285
	275/60R20	-	115H	-	8J	279	838	250	1215
22	285/30R21	-	100W	XL	10J	290	705	290	800
	245/35R21	-	96W	XL	8½J	248	705	290	710
	265/45R21	-	104W	-	9J	266	771	250	900
	275/50R21	-	113W	XL	8½J	284	809	290	1150
22	275/40ZR22	-	107W	XL	9½J	278	779	290	975
	285/45R22	-	114V	XL	9½J	285	815	290	1180
	275/50R22	-	111V	-	8½J	284	835	250	1090




MU169
Suitable for Pick-up Trucks



ALL-TERRAIN ABILITY FREELY DRIVES

Rim Size:	15-20
Speed Rating:	R-V
Series:	55-70

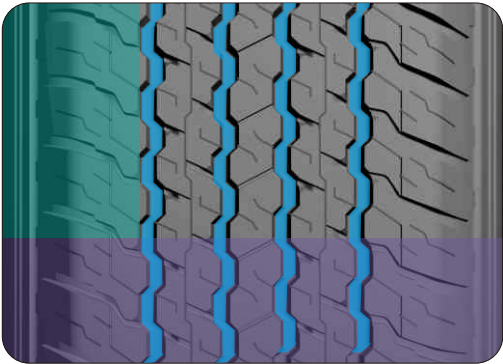

IMPROVED COMFORTABLE
EXPERIENCE

- Tread : Optimized pitch sequence arrangement, multi-pitch design for noise reduction. Numerous evenly distributed knife groove pattern design reduces the rigidity of tread pattern blocks and improves driving comfort.
- Tire shoulder : Closed groove design on the shoulder reduces resonance of columnar airflow and noise.

BETTER HANDLING ON
VARIOUS ROAD CONDITIONS

- Four wide zigzag-shaped grooves bring excellent water-displacement ability, evenly spread stress across the tread, improve traction on mud ground and reduce the chance of gravels being struck in the tread.

STRONGER AND LONG MILEAGE

- The tread uses materials and ingredients designed for good wear-resisting and anti-tearing performance, thus the tread can defend against impacts from flying gravels and prolong tire's service life. Together with enhanced carcass and bead, tire's load-carrying capacity is greatly improved.

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
15	255/70R15C	6/C	112/110S	-	7½J	260	739	375	1120
	265/70R16	-	112S	-	8J	272	778	250	1120
16	275/70R16	-	114H	-	8J	279	792	250	1180
	205R16C	6/C	106/104R	-	6J	208	734	350	950
17	265/65R17	-	112T	-	8J	272	776	250	1120
	275/65R17	-	115H	-	8J	279	790	250	1215

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
17	285/65R17	-	116H	-	8½J	292	802	250	1250
	265/70R17	-	115S	-	8J	272	804	250	1215
18	265/60R18	-	110H	-	8J	272	775	250	1060
	285/60R18	-	116H	-	8½J	292	799	250	1250
20	265/55R20	-	113V	XL	8½J	277	800	290	1150



MU050

Suitable for mid-large SUV & off-road vehicles



- Tiger-teeth tread pattern provides excellent grip with great mountain and off-road performance.
- The main structure consists of two inner water expelling treads and two outer water expelling treads, providing excellent water expelling performance on mud and wet road conditions.

- Special 3D water expelling tread with enhanced structure prevents stress concentration on the tread and pebbles trapping conditions.

INTERLEAVING SHOULDER TREAD PATTERN AND ARMOR SIDEWALL

- Guarantees exceptional control on wet and sandy road conditions, effectively avoid wearing during demanding road condition.

3D SHOULDER DESIGN

- For exceptional control on wet and sandy road conditions, effectively avoid wearing during demanding road condition.

Rim Size: 15-20
Speed Rating: Q-V
Series: 50-85

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
15	205/65R15	-	94H	-	6J	209	647	250	670
	205/70R15	-	96H	-	6J	209	669	250	710
	215/75R15LT	6/C	100/97S	-	6J	216	703	350	800
	30×9.50R15LT	6/C	104S	-	7½J	240	750	350	900
	31×10.50R15LT	6/C	109Q	-	8½J	268	775	350	1030
16	205/60R16	-	92H	-	6J	209	652	250	630
	235/70R16	-	106S	-	7J	240	736	250	950
	245/70R16	-	111T	XL	7J	248	750	290	1090
	255/70R16	-	111T	-	7½J	260	764	250	1090
	265/70R16	-	112S	-	8J	272	778	250	1120
16	275/70R16	-	114S	-	8J	279	792	250	1180
	LT225/75R16	10/E	115/112S	-	6J	223	744	550	1215
	LT245/75R16	6/C	108/104S	-	7J	248	774	350	1000
	LT265/75R16	10/E	123/120S	-	7½J	267	804	550	1550

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
16	LT285/75R16	10/E	126/123R	-	8J	286	834	550	1700
	LT235/85R16	10/E	120/116S	-	6½J	235	806	550	1380
	225/65R17	-	102T	-	6½J	228	724	250	850
17	245/65R17	-	107T	-	7J	248	750	250	975
	265/65R17	-	112S	-	8J	272	776	250	1120
	275/65R17	-	115S	-	8J	279	790	250	1215
	285/65R17	-	116S	-	8½J	292	802	250	1250
	LT265/70R17	10/E	121/118S	-	8J	272	804	550	1450
18	LT285/70R17	10/E	121/118R	-	8½J	292	832	550	1450
	265/60R18	-	110H	-	8J	272	775	250	1060
	285/60R18	-	116H	-	8½J	292	799	250	1250
	265/50R20	-	111V	XL	8½J	277	774	290	1090
20	285/50R20	-	116H	XL	9J	297	794	290	1250
	275/55R20	-	117H	XL	8½J	284	810	290	1285



MU053

All-road off-road vehicles




TREAD SELF-CLEANING TECHNOLOGY, NO FEAR OF SAND

■ The tread is designed with three-dimensional sand-removing stone stepped grooves and reinforcing ribs to prevent stress concentration on the tread, effectively prevent gravel inclusion and avoid tire damage due to gravel inclusion.

GRASP THE GROUND STRONGLY AND DEAL WITH ALL KINDS OF ROAD CONDITIONS EASILY.

■ The rough block pattern of "butterfly" arrangement provides strong grip and ensures the off-road performance of tires in complex road conditions. Staggered serrated shoulder flowers ensure the handling performance of tires on unpaved roads.

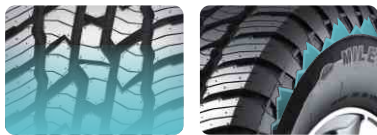

THE BODY OF KING KONG, GUARDING IN ALL DIRECTIONS

- 1. Tread: adopt high wear-resistant and tear-resistant formula, puncture-resistant;
- 2. Carcass: with double-layer carcass skeleton structure, stronger;
- 3. Sidewall: 3D peak design can effectively resist external impact; Three-pronged approach, casting the body of King Kong.
- The tires are stronger, more wear-resistant, and safer to drive without fear of pricking.

Rim Size: 15-16
Speed Rating: S-H
Series: 60-75

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
15	205/65R15	-	94H	-	6J	209	647	250	670
	205/70R15	-	96H	-	6J	209	669	250	710
	235/75R15	-	109T	XL	6½J	235	733	290	1030
	31×10.50R15LT	6/C	109S	-	8½J	268	775	350	1030
16	205/60R16	-	92H	-	6J	209	652	250	630

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
16	235/70R16	-	106T	-	7J	240	736	250	950
	245/70R16	-	111T	XL	7J	248	750	290	1090
	255/70R16	-	111T	-	7½J	260	764	250	1090
	265/70R16	-	112T	-	8J	272	778	250	1120



MU160
Suitable for off-road cars



Rim Size:	16-22
Speed Rating:	Q-T
Series:	55-75



ROUGH PATTERNS, NOT AFRAID OF MOUNTAIN CHALLENGES

■ Unique double-wide, zigzag self-cleaning main ditch, excellent drainage capacity of wetland; With open shoulder block design, it provides strong traction and lateral stability, and has stronger grip on muddy and sandy roads.

STRONGER AND MORE DURABLE

■ The tread adopts customized formula with high wear resistance and tear resistance, which can effectively resist the impact of pavement sand and prolong the service life. Combined with the reinforced carcass and bead design, the carcass is solid, which greatly improves the load resistance of the tire.

ACTIVE NOISE REDUCTION TO IMPROVE DRIVING COMFORT

■ The unique design of shuttle X armor central tread pattern can not only effectively improve the puncture resistance, but also optimize the grounding cut-in angle. Combined with the multi-directional zigzag groove active noise reduction technology, the resonance of columnar airflow is reduced, and the pitch arrangement of the whole tread is optimized to reduce the passing noise and improve the driving comfort.



■ Three-dimensional white design beside flowers shows a variety of visual experiences.

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
16	245/70R16LT	8/D	113/110S	-	7J	248	750	450	1150
	265/70R16LT	8/D	117/114Q	-	8J	272	778	450	1285
	LT245/75R16	10/E	120/116S	-	7J	248	774	550	1380
17	265/65R17LT	10/E	120/117Q	-	8J	272	776	550	1400
	245/70R17LT	10/E	119/116S	-	7J	248	776	550	1360

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
17	LT265/70R17	10/E	121/118S	-	8J	272	804	550	1450
18	265/60R18LT	10/E	119/116Q	-	8J	272	775	550	1360
20	275/55R20	-	117T	XL	8½J	284	810	290	1285
	33×12.50R20LT	10/E	114Q	-	10J	318	832	450	1180
22	33×12.50R22LT	10/E	109Q	-	10J	318	832	450	1030



MC545

Suitable for all serson



- Single directional pattern gives excellent stability at high speed, stronger snow expelling and water drainage performance.
- Massive quantity of transverse grooves strengthen performance in snow expelling , water drainage and other indexes including anti-wear, braking, controlling and noise.
- Narrow Circumferential groove and wider contact surface help to enhance tire grip and safety on wet roads.
- Large quantity of tiny steel straps in the middle guarantee good performance on snow and small amount of steel design on the shoulder ensures excellent performance on dry and wet roads.

Double layer tread along with all season formula decreases rolling resistance, tire weight and optimizes performance on dry and wet roads. Low noise design is achieved by noise optimization software with regards to pitch misalignment and sequence.

Rim Size:	13-20
Speed Rating:	T-Y
Series:	35-80

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
13	155/70R13	-	75T	-	4½J	157	548	250	387
	165/70R13	-	79T	-	5J	170	562	250	437
	155/80R13	-	79T	-	4.50B/4½J	157	578	240	437
14	185/60R14	-	82H	-	5½J	189	578	250	475
	155/65R14	-	75T	-	4.50B/4½J	157	558	250	387
	175/65R14	-	82T	-	5J	177	584	250	475
	165/70R14	-	81T	-	5J	170	588	250	462
	175/70R14	-	88T	XL	5J	177	602	290	560
	195/50R15	-	82V	-	6J	201	577	250	475
15	185/55R15	-	86H	XL	6J	194	585	290	530
	185/60R15	-	88H	XL	5½J	189	603	290	560
	195/60R15	-	88H	-	6J	201	615	250	560
	175/65R15	-	84H	-	5J	177	609	250	500
	185/65R15	-	88H	-	5½J	189	621	250	560
	195/65R15	-	91H	-	6J	201	635	250	615
16	215/65R15	-	96H	-	6½J	221	661	250	710
	195/45R16	-	84V	XL	6½J	195	582	290	500
	215/45R16	-	90V	XL	7J	213	600	290	600
	195/55R16	-	91V	XL	6J	201	620	290	615

14	185/55R14	-	80H	-	6J	194	560	250	450	★
	165/60R14	-	79H	XL	5J	170	554	290	437	★
	165/65R14	-	79T	-	5J	170	570	250	437	★
	185/65R14	-	86H	-	5½J	189	596	250	530	★
15	195/55R15	-	85V	-	6J	201	595	250	515	★
	165/60R15	-	81H	XL	5J	170	579	290	462	★
	165/65R15	-	81H	-	5J	170	595	250	462	★
	205/65R15	-	94V	-	6J	209	647	250	670	★
16	205/45ZR16	-	87W	XL	7J	206	590	290	545	★
	185/50R16	-	81V	-	6J	194	592	250	462	★
	195/50R16	-	88V	XL	6J	201	602	290	560	★
	185/55R16	-	87V	XL	6J	194	610	290	545	★
	225/55ZR16	-	99W	XL	7J	233	654	290	775	★
	215/60R16	-	99V	XL	6½J	221	664	290	775	★
17	215/65R16	-	102V	XL	6½J	221	686	290	850	★
	215/40R17	-	87V	XL	7½J	218	604	290	545	★
	205/55ZR17	-	95W	XL	6½J	214	658	290	690	★
	225/60R17	-	103V	XL	6½J	228	702	290	875	★
	225/65R17	-	106V	XL	6½J	228	724	290	950	★
	235/65ZR17	-	108W	XL	7J	240	738	290	1000	★
18	215/40ZR18	-	89W	XL	7½J	218	629	290	580	★
	235/40ZR18	-	95Y	XL	8½J	241	645	290	690	★
	245/40ZR18	-	97W	XL	8½J	248	653	290	730	★
	215/45R18	-	93V	XL	7J	213	651	290	650	★
	235/45ZR18	-	98Y	XL	8J	236	669	290	750	★

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
16	205/55R16	-	94V	XL	6½J	214	632	290	670
	215/55R16	-	97V	XL	7J	226	642	290	730
	205/60R16	-	96V	XL	6J	209	652	290	710
	215/70R16	-	100H	-	6½J	221	708	250	800
17	205/45ZR17	-	88W	XL	7J	206	616	290	560
	215/45ZR17	-	91W	XL	7J	213	626	290	615
	225/45ZR17	-	94W	XL	7½J	225	634	290	670
	235/45ZR17	-	97W	XL	8J	236	644	290	730
	245/45ZR17	-	99W	XL	8J	243	652	290	775
	205/50ZR17	-	93W	XL	6½J	214	638	290	650
18	215/50ZR17	-	95W	XL	7J	226	648	290	690
	225/50ZR17	-	98W	XL	7J	233	658	290	750
	215/55ZR17	-	98W	XL	7J	226	668	290	750
	225/55ZR17	-	101W	XL	7J	233	680	290	825
	235/55ZR17	-	103W	XL	7½J	245	690	290	875
	215/60R17	-	100V	XL	6½J	221	690	290	800
19	225/40ZR18	-	92W	XL	8J	230	637	290	630
	225/45R18	-	95V	XL	7½J	225	659	290	690
	215/55R18	-	99V	XL	7J	226	693	290	775
	245/45ZR18	-	100W	XL	8J	243	677	290	800
	215/50ZR18	-	92W	-	7J	226	673	250	630
	225/50ZR18	-	99W	XL	7J	233	683	290	775
20	235/50ZR18	-	101W	XL	7½J	245	693	290	825
	225/55R18	-	98V	-	7J	233	705	250	750
	235/55R18	-	104V	XL	7½J	245	715	290	900
	225/60R18	-	104V	XL	6½J	228	727	290	900
	235/60R18	-	107V	XL	7J	240	739	290	975
	235/35ZR19	-	91Y	XL	8½J	241	647	290	615
21	255/35ZR19	-	96Y	XL	9J	260	661	290	710
	225/40ZR19	-	93Y	XL	8J	230	663	290	650
	235/40ZR19	-	96Y	XL	8½J	241	671	290	710
	245/40ZR19	-	98Y	XL	8½J	248	679	290	750
	225/45ZR19	-	96Y	XL	7½J	225	685	290	710
	235/45ZR19	-	99Y	XL	8J	236	695	290	775
22	245/45ZR19	-	102W	XL	8J	243	703	290	850
	235/50R19	-	99V	-	7½J	245	719	290	875
	255/50R19	-	107V	XL	8J	265	739	290	975
	205/55ZR19	-	97W	XL	6½J	214	709	290	730
	225/55R19	-	99V	-	7J	233	731	250	775
	235/55ZR19	-	105W	XL	7½J	245	741	290	925
23	235/35ZR20	-	92W	XL	8½J	241	672	290	630
	255/45ZR20	-	105W	XL	8½J	255	738	290	925
24	195/55R20	-	95H	XL	6J	201	722	290	690

★:coming soon

MC557

For commercial light trucks



REINFORCED CARCASS, THE BETTER LOAD-BEARING PERFORMANCE

■ Designed for commercial light truck with double carcass structure, it has better load-bearing performance.

SUPERIOR WETLAND PERFORMANCE AND SKID RESISTANCE

- The tread groove design with S-shape on both sides and Z-shape in the middle which can greatly enhance the tire water displacement performance.
- The wide groove and asymmetrical pattern design bring excellent handling stability and outstanding water displacement performance on icy and wet

EXCELLENT FOUR SEASONS CAPACITY

■ Bring excellent performance to the Tire no matter in Spring, Summer, Autumn or Winter, by using special All-season tire rubber formulation.



Pattern joint



The shape of groove like "T"



Have the difference between high and low at the edge of shoulder



The more close pattern groove

Rim Size: 15-16
Speed Rating: R-T
Series: 65-75


Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
15	195/70R15C	8/D	104/102R	-	6J	201	655	450	900
	215/70R15C	8/D	109/107R	-	6½J	221	683	450	1030
	225/70R15C	8/D	112/110R	-	6½J	228	697	450	1120
16	195/65R16C	8/D	104/102T	-	6J	201	660	475	900
	205/65R16C	8/D	107/105R	-	6J	209	672	475	975
	215/65R16C	8/D	109/107R	-	6½J	221	686	475	1030

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
16	225/65R16C	8/D	112/110R	-	6½J	228	698	475	1120
	235/65R16C	8/D	115/113R	-	7J	240	712	475	1215
	195/75R16C	8/D	107/105T	-	5½J	196	698	475	975
	215/75R16C	8/D	113/111R	-	6J	216	728	475	1150
	225/75R16C	10/E	121/120R	-	6J	223	744	575	1450



MW255

Suitable for icy and snowy road

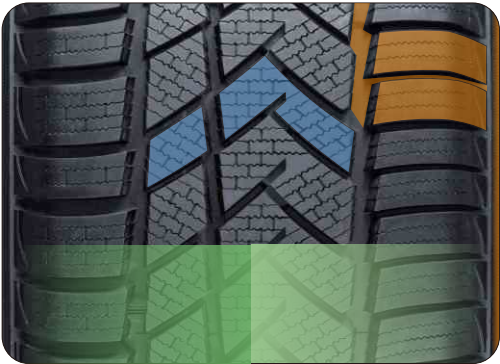

DRAINAGE AND SLIP RESISTANCE

■ Three longitudinal grooves designed on tread improve slip resistant performance on snowy roads in winter.

HERRING BONE PATTERNS PROVIDING STRONGER GRIP

■ Herring bone patterns on tread have strong ice breaking and water drainage performance, and big ground touching areas ensures the characteristics of tires on icy and snowy roads.

BETTER OPERATION AND CONTROL PERFORMANCE

■ Asymmetric pattern design optimizes the performance of tires on dry and wet grounds, and improves comprehensive operation and control of tires on icy and snowy roads.

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
15	195/50R15	-	82H	-	6J	201	577	250	475
	195/55R15	-	85H	-	6J	201	595	250	515
	195/55R16	-	87H	-	6J	201	620	250	545
	205/55R16	-	91H	-	6½J	214	632	250	615
	215/55R16	-	97H	XL	7J	226	642	290	730
16	225/55R16	-	99H	XL	7J	233	654	290	775
	205/60R16	-	96H	XL	6J	209	652	290	710
	215/60R16	-	99H	XL	6½J	221	664	290	775
	215/65R16	-	98H	-	6½J	221	686	250	750
	225/45R17	-	94V	XL	7½J	225	634	290	670
17	235/45R17	-	97V	XL	8J	236	644	290	730
	205/50R17	-	93V	XL	6½J	214	638	290	650
	215/50R17	-	95V	XL	7J	226	648	290	690

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
17	225/50R17	-	98V	XL	7J	233	658	290	750
	205/55R17	-	95V	XL	6½J	214	658	290	690
	215/55R17	-	98V	XL	7J	226	668	290	750
	225/55R17	-	101V	XL	7J	233	680	290	825
	235/55R17	-	103V	XL	7½J	245	690	290	875
18	255/35R19	-	96V	XL	9J	260	661	290	710
	225/40R18	-	92V	XL	8J	230	637	290	630
	235/40R18	-	95V	XL	8½J	241	645	290	690
	245/40R18	-	97V	XL	8½J	248	653	290	730
	235/45R18	-	98V	XL	8J	236	669	290	750
19	245/45R19	-	102V	XL	8J	243	703	290	850
	255/40R19	-	100V	XL	9J	260	687	290	800
	235/55R19	-	105V	XL	7½J	245	741	290	925

Rim Size: 15-19
Speed Rating: H-V
Series: 35-65



MW655

Suitable for icy and snowy road



■ Advanced piece-shape pattern design with special formula for ice and snow provides newly-developed tread with better flexibility and bigger ground area when tires are driven on a snowy road. Snow columns are not easy to be cut off, and tires can be provided with more powerful driving forces.

MORE BALANCED PERFORMANCE

■ Symmetric pattern design and big shoulder pattern piece design, which can produce lateral forces when tires are driven, improve traction on snowy and icy roads. It significantly improves driving and braking performance, and optimizes driving precision on dry and wet roads to the maximum, more helpful to reduce driving noise.

MORE LASTING EFFECT

■ Special formula for ice and snow can ensure that tires maintain a very good winter performance in the middle and late period of wearing.

Rim Size:	13-15
Speed Rating:	T-H
Series:	55-80

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
13	155/70R13	-	75T	-	4½J	157	548	250	387
	165/70R13	-	79T	-	5J	170	562	250	437
	165/70R13	-	83T	XL	5J	170	562	290	487
	175/70R13	-	82T	-	5J	177	576	250	475
	155/80R13	-	79T	-	4½J	157	578	240	437
14	185/60R14	-	86T	XL	5½J	189	578	290	530
	175/65R14	-	86T	XL	5J	177	584	290	530
	185/65R14	-	86T	-	5½J	189	596	250	530
	165/70R14	-	85T	XL	5J	170	588	290	515
	175/70R14	-	88T	XL	5J	177	602	290	560

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
14	185/70R14	-	88T	-	5½J	189	616	250	560
	185/55R15	-	86H	XL	6J	194	585	290	530
	185/60R15	-	84T	-	5½J	189	603	250	500
	185/60R15	-	88T	XL	5½J	189	603	290	560
	195/60R15	-	88T	-	6J	201	615	250	560
15	185/65R15	-	88T	-	5½J	189	621	250	560
	195/65R15	-	91H	-	6J	201	635	250	615
	195/65R15	-	95T	XL	6J	201	635	290	690
	205/65R15	-	99T	XL	6J	209	647	290	775



MW675

Suitable for saloon car/suv in icy and snowy road conditions



Inlaid nail anti-skid technology and Super-strong grip;
Excellent wetland performance and effective prevention of skidding;
Superior handling and braking performance.

Rim Size:	14-18
Speed Rating:	T-H
Series:	55-65



DESIGNED FOR ICY AND SNOWY ROAD CONDITIONS

■ With optimized stud hole arrangement, the tire can be equipped with 200 snow nails (Here take 205/55R16 as an example, different sizes have different circumstances). The studdable anti-skid technology shows super-strong grip studdable on snowy and icy roads.

UNIDIRECTIONAL PATTERN

■ Unidirectional pattern design can effectively break and remove snow, enhancing performance on wet ground. This design on tread significantly improves skid resistance performance on snowy and icy roads in winter.

MORE SUBTLE DESIGN CAN ENHANCE THE PERFORMANCE OF HANDLING AND BRAKING PERFORMANCE

■ As you can see, tire pattern is concave and convex shape at the edge of the groove and the sharp teeth shape in the middle of the groove. The shape of each pattern looks like lightning. The design of these pattern grooves can effectively break and remove snow, also significantly enhance handling and braking performance in icy and snowy road conditions.

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
14	185/60R14	-	82T	-	5½J	189	578	250	475
	175/65R14	-	86T	XL	5J	177	584	290	530
	185/65R14	-	86T	-	5½J	189	596	250	530
15	185/60R15	-	84T	-	5½J	189	603	250	500
	185/65R15	-	88H	-	5½J	189	621	250	560
	195/65R15	-	95T	XL	6J	201	635	290	690
16	205/55R16	-	94T	XL	6½J	214	632	290	670
	205/60R16	-	92H	-	6J	209	652	250	630

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
16	215/65R16	-	102H	XL	6½J	221	686	290	850
	215/55R17	-	98H	XL	7J	226	668	290	750
	225/55R17	-	101H	XL	7J	233	680	290	825
17	215/60R17	-	96H	-	6½J	221	690	250	710
	225/60R17	-	103H	XL	6½J	228	702	290	875
	225/65R17	-	102T	-	6½J	228	724	250	850
18	225/55R18	-	102H	XL	7J	233	705	290	850
	225/60R18	-	104H	XL	6½J	228	727	290	900




MW356

For car /SUV in ice and snow conditions



Impressive braking and cornering ability in winter driving conditions

Rim Size:	13-22
Speed Rating:	Q-H
Series:	35-70

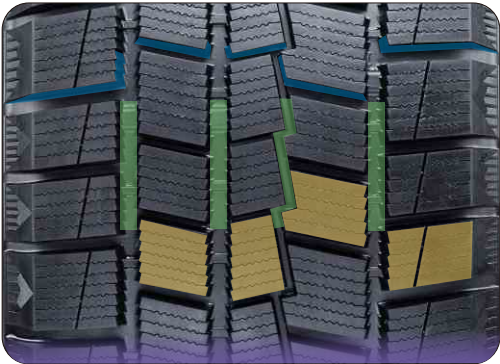

EXCELLENT BRAKING PERFORMANCE

■ The reinforced bars and jagged design provide excellent braking performance that ensures safety in driving.



PRECISE CONTROL

■ The wide groove and asymmetrical pattern design bring excellent handling stability and outstanding drainage performance on snowy and icy roads.

STRONG GRIP

■ The increased number of lugs and grooves on tread provide better snow traction and drainage performance, showing excellent grip capability on snowy and icy roads.

In the early stage of development, we optimized stress distribution on tire by FE simulation analysis. The actual footprint of tire shows that the stress distribution is uniform and the grounding area is increased, indicating the improved stability and safety of the tire when traveling on snowy and icy roads.

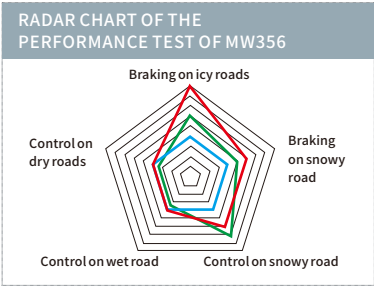

International brand B
International brand G
MILEVER MW356

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
13	165/70R13	-	83Q	XL	5.00B/5J	170	562	290	487
	175/70R13	-	82Q	-	5.00B/5J	177	576	250	475
	175/60R13	-	77Q	-	5.00B/5J	177	540	250	412
	185/60R14	-	82Q	-	5½J	189	578	250	475
14	155/65R14	-	75Q	-	4.50B/4½J	157	558	250	387
	175/65R14	-	82Q	-	5.00B/5J	177	584	250	475
	185/65R14	-	90Q	XL	5½J	189	596	290	600
	165/70R14	-	85Q	XL	5.00B/5J	170	588	290	515
15	175/70R14	-	88Q	XL	5.00B/5J	177	602	290	560
	185/70R14	-	88Q	-	5½J	189	616	250	560
	185/60R15	-	84Q	-	5½J	189	603	250	500
	195/60R15	-	88Q	-	6J	201	615	250	560
16	175/65R15	-	84Q	-	5J	177	609	250	500
	185/65R15	-	88Q	-	5½J	189	621	250	560
	195/65R15	-	91Q	-	6J	201	635	250	615
	205/65R15	-	94Q	-	6J	209	647	250	670
17	205/70R15	-	96Q	-	6J	209	669	250	710
	205/55R16	-	91S	-	6½J	214	632	250	615
	215/55R16	-	97Q	XL	7J	226	642	290	730
	205/60R16	-	92Q	-	6J	209	652	250	630
18	215/60R16	-	99Q	XL	6½J	221	664	290	775

16	235/70R16	-	106S	-	7J	240	736	250	950	★
	245/70R16	-	107S	-	7J	248	750	250	975	★
	255/70R16	-	111S	-	7½J	260	764	250	1090	★
	265/70R16	-	112S	-	8J	272	778	250	1120	★
17	205/50R17	-	89T	-	6½J	214	638	250	580	★
	245/40R18	-	93T	-	8½J	248	653	250	650	★
	235/45R18	-	94T	-	8J	236	669	250	670	★
	225/50R18	-	95T	-	7J	233	683	250	690	★
18	245/50R18	-	100T	-	7½J	253	703	250	800	★
	225/55R18	-	98T	-	7J	233	705	250	750	★
	265/65R18	-	114T	-	8J	272	801	250	1180	★
	275/35R19	-	96H	-	9½J	278	675	250	710	★
19	235/40R19	-	92H	-	8½J	241	671	250	630	★
	245/40R19	-	94H	-	8½J	248	679	250	670	★
	275/40R19	-	101H	-	9½J	275	703	250	825	★
	235/45R19	-	95H	-	8J	236	695	250	630	★
20	245/45R19	-	98H	-	8J	243	703	250	750	★
	255/45R19	-	100H	-	8½J	255	713	250	800	★
	245/50R19	-	101H	-	7½J	253	729	250	825	★
	265/50R19	-	106H	-	8½J	277	749	250	950	★
21	255/55R19	-	107H	-	8J	265	763	250	975	★
	265/55R19	-	109H	-	8½J	277	775	250	1030	★
	235/60R19	-	103H	-	7J	240	765	250	875	★

Rim	Size	PR	LI&SS	XL	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
16	225/60R16	-	98Q	-	6½J	228	676	250	750
	205/65R16	-	95Q	-	6J	209	672	250	690
	215/65R16	-	98Q	-	6½J	221	686	250	750
	215/70R16	-	100Q	-	6½J	221	708	250	800
17	235/45R17	-	97S	XL	8J	236	644	290	730
	215/50R17	-	95S	XL	7J	226	648	290	690
	225/50R17	-	98S	XL	7J	233	658	290	750
	215/55R17	-	94S	-	7J	226	668	250	670
18	225/55R17	-	97S	-	7J	233	680	250	730
	235/55R17	-	103S	XL	7½J	245	690	290	875
	215/60R17	-	96S	-	6½J	221	690	250	710
	225/60R17	-	103S	XL	6½J	228	702	290	875
19	225/65R17	-	102S	-	6½J	228	724	250	850
	235/65R17	-	104S	-	7J	240	738	250	900
	245/65R17	-	111S	XL	7J	248	750	290	1090
	265/65R17	-	112S	-	8J	272	776	250	1120
20	225/45R18	-	95S	XL	7½J	225	659	290	690
	245/45R18	-	100S	XL	8J	243	677	290	800
	215/55R18	-	99S	XL	7J	226	693	290	775
	225/60R18	-	104S	XL	6½J	228	727	290	900
21	235/60R18	-	107S	XL	7J	240	739	290	975

19	255/60R19	-	109H	-	7½J	260	789	250	1030	★
	275/35R20	-	98H	-	9½J	278	700	250	750	★
	315/35R20	-	106H	-	11J	320	728	250	950	★
	255/40R20	-	97H	-	9J	260	712	250	730	★
20	265/40R20	-	100H	-	9½J	271	720	250	800	★
	275/40R20	-	102H	-	9½J	278	728	250	850	★
	255/45R20	-	101H	-	8½J	255	738	250	825	★
	265/45R20	-	104H	-	9J	266	746	250	900	★
21	285/45R20	-	108H	-	9½J	285	764	250	1000	★
	235/50R20	-	100H	-	7½J	245	744	250	800	★
	245/50R20	-	102H	-	7½J	253	754	250	850	★
	275/50R20	-	109H	-	8½J	284	784	250	1030	★
22	285/50R20	-	112H	-	9J	297	794	250	1120	★
	255/55R20	-	110H	XL	8J	265	788	290	1060	★
	275/55R20	-	113H	-	8½J	284	810	250	1150	★
	275/45R21	-	107H	-	9J	273	781	250	975	★
23	285/45R21	-	109H	-	9½J	285	789	250	1030	★
	315/35ZR22	-	111H	XL	11J	320	779	290	1090	★
	265/40R22	-	106H	XL	9½J	271	771	290	950	★
	275/40R22	-	107H	XL	9½J	278	779	290	975	★
24	285/40R22	-	106H	-	10J	290	787	250	950	★
	285/45R22	-	110H	-	9½J	285	815	250	1060	★

★:coming soon

MW147

For commercial light truck in ice and snow conditions



Excellent carrying capacity
Superior wetland performance and skid resistance
Super-strong grip on icy and snowy road

Rim Size:	15-16
Speed Rating:	R-T
Series:	65-75



REINFORCED CARCASS, THE BETTER
LOAD-BEARING PERFORMANCE


■ Designed for commercial light truck with double carcass structure, it has better load-bearing performance.

SUPERIOR WET ROAD PERFORMANCE
AND SKID RESISTANCE

■ The tread groove design with s shape on both sides and z shape in the middle which can greatly enhance the tire drainage performance. The wide groove and asymmetrical pattern design bring excellent handling stability and outstanding drainage performance on icy and wet road.

SUPER-STRONG GRIP ON ICY AND
SNOWY ROAD


■ The upgraded tread groove design can effectively strengthen the tire grip and braking performance, which ensures safety and stability in driving.



Pattern joint



The shape of
groovelike "T"



Have the difference
between high and low
at the edge of shoulder



The more close
pattern groove

Rim	Size	PR	LI&SS	XL	Std. Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
15	195/70R15C	8/D	104/102R	-	6J	201	655	450	900
	215/70R15C	8/D	109/107R	-	6½J	221	683	450	1030
	225/70R15C	8/D	112/110R	-	6½J	228	697	450	1120
16	195/65R16C	8/D	104/102T	-	6J	201	660	475	900
	205/65R16C	8/D	107/105R	-	6J	209	672	475	975
	215/65R16C	8/D	109/107R	-	6½J	221	686	475	1030

Rim	Size	PR	LI&SS	XL	Std. Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (KPa)	Load Capacity (Kg)
15	225/65R16C	8/D	112/110R	-	6½J	228	698	475	1120
	235/65R16C	8/D	115/113R	-	7J	240	712	475	1215
	195/75R16C	8/D	107/105T	-	5½J	196	698	475	975
16	215/75R16C	8/D	113/111R	-	6J	216	728	475	1150
	225/75R16C	10/E	121/120R	-	6J	223	744	575	1450

